


Fail Safe Tester Controller Card (CC)

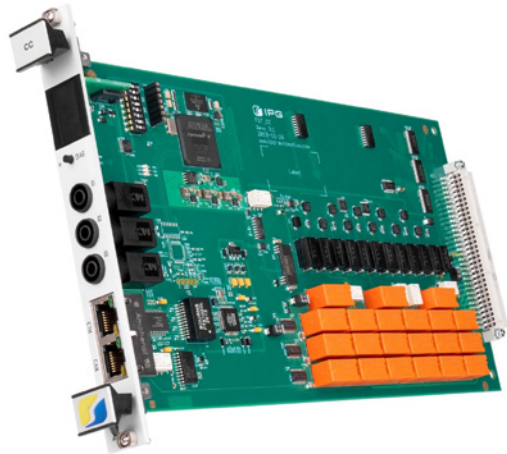

Features

The controller controls the function of the relay- and resistor cards according to commands received via Rs232 or CAN. The current operation status is shown on a 2 digit display.

The controller is equipped with a system diagnosis function.

Technical Data

Maximum I/O voltage	AC/DC < 50V
Maximum I/O load (resistive)	DC: < 36 V : 5A, > 36 V : 2A; AC: < 50 V : 5 A
CANInterface	50 kBaud, 500 kBaud (default), 1 MBaud
Serial interface (RS232)	9,6 kBaud, 19,2 kBaud, 38,4 kBaud, 57,6 kBaud
Maximum length of connected wires	<3 m, for EMV reasons
Size	4 U, requires 1 Slot
Connectors	1x RJ45 for communication (CAN/RS232); 3x 4 mm banana jacks for Signal I/O and cascading 2 or more FailSafeTesters

Order Information

Order Number	FST-CC-SFP
--------------	------------