


F1001 – 3U 1 Slot M-Module Carrier Board

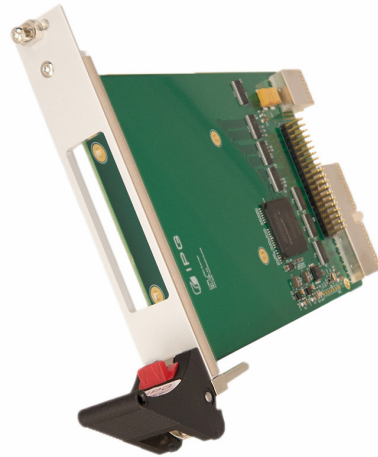


Features

- M-Module™ slots
 - One M-Module™ slot
 - Compliant with M-Module™ standard
 - Characteristics: A08D16, A24D32,
 - INTA, TRIGI, TRIGO
- CompactPCI® bus
 - Only one slot on the 3U CompactPCI® bus required
 - 32-bit / 33/66 MHz PCI-to-M-Module™ bridge
 - FPGA-based
- Mechanical specifications
 - Dimensions: Conforming to CompactPCI® specification for 6U boards
 - Front panel: aluminum with one handle, cut-outs for front connector of M-Module™
- Designed for using M-Modules in NI systems
- Supports 8 PXI trigger lines

Block Diagram

F1001

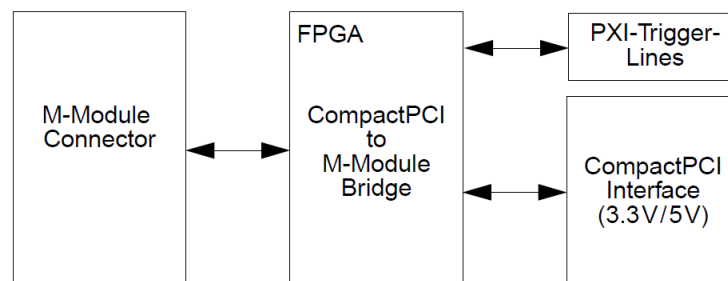

Order Information

Order Number	IO-F1001
--------------	----------